


PRODUCTSHEET

CROSSOVER Large 68m²

Structure dimensions

Length  829 cm


Width  829 cm

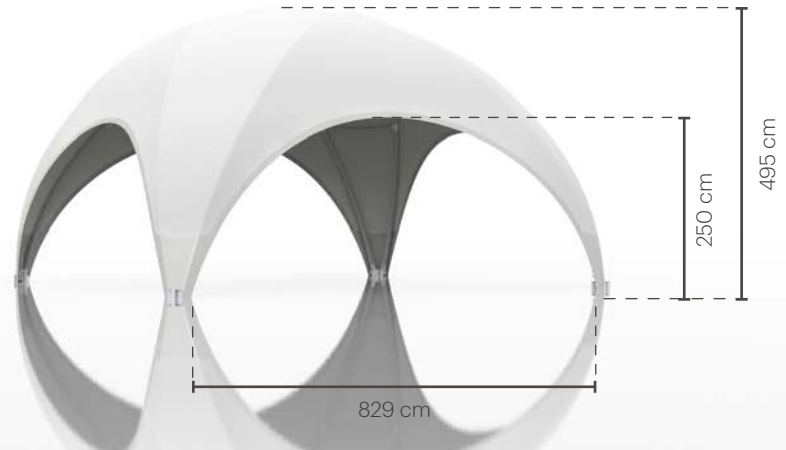


Side panels



Sidewall



Sidewall with door



Sidewall with window



Sidewall with window and door

Materials

STRUCTURE MATERIALS

Structure 6082T6 Alloy
Couplings Galvanized steel
Cables Stainless steel 316

COVER MATERIALS

Mehler Airtex® magic 350 grams/m²
California T19 M2/B1 certification
Cold resistance -20 °C
High temperature +70°C

Contours and corners are made of PVC

Ferrari Stam 6002 630 grams/m²
California T19 M2/B1 certification
Cold resistance -30°C
High temperature +70°C

Contours and corners are made of Ferrari Stam




PRODUCTSHEET


CROSSOVER Large 68m²

Transport Dimensions & Weights

STANDARD
1 CRATE OF

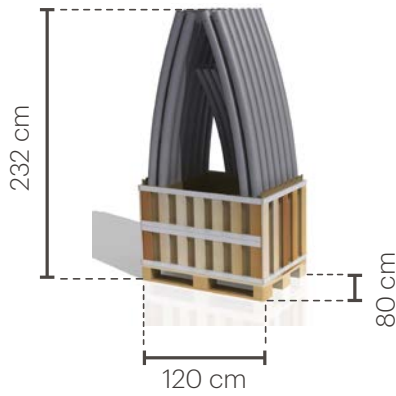

ALTERNATIVE
1 CRATE OF

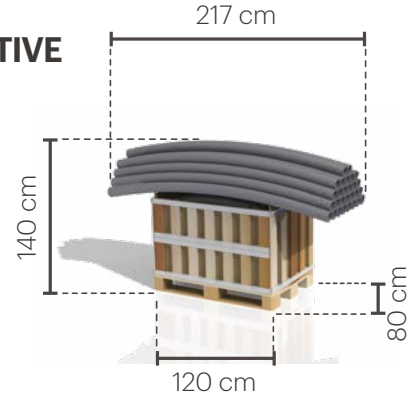

Structure packed standard (excl cover)
Structure packed alternative (excl cover)

120 x 80 x 232 cm
217 x 80 x 140 cm


413,0 Kilo
413,0 Kilo

Cover in Airtex
Sidewall in Airtex
Sidewall with windows in Airtex
Connection gutter M in Airtex
Connection gutter M/L in Airtex
Ground pin
Ballast plate


80 x 50 x 40 cm
60 x 60 x 10 cm
70 x 60 x 10 cm
30 x 45 x 10 cm
55 x 55 x 8 cm
100 x 3,5 Ø cm
100 x 100 x 9,5 cm

46,0 Kilo
8,5 Kilo
12,0 Kilo
2,4 Kilo
8 Kilo
7,6 Kilo
± 50,0 Kilo

Mounting

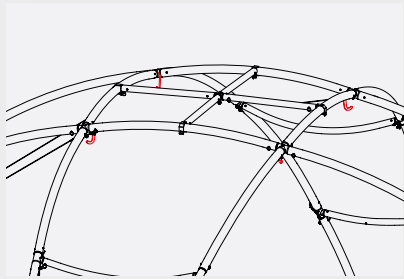

Mount up to 400 kilo in total by using the hooks

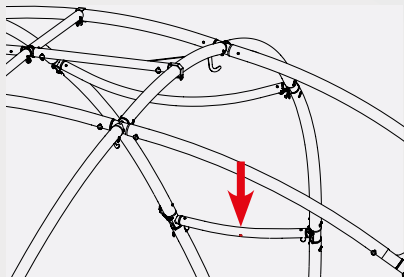

M10 screw insert in lower sub profile for mounting lights, music, tv and heating




PRODUCTSHEET

CROSSOVER Large 68m²


Gutters

Gutters Large to Large

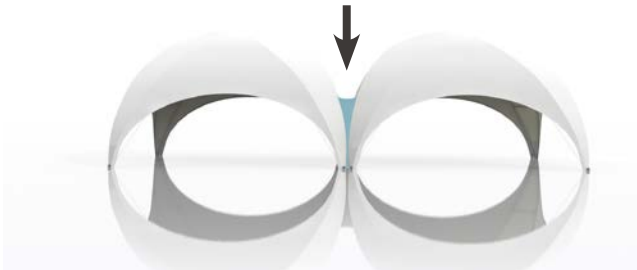


Connect Crossover Large with Crossover Large

Gutters Large to Medium

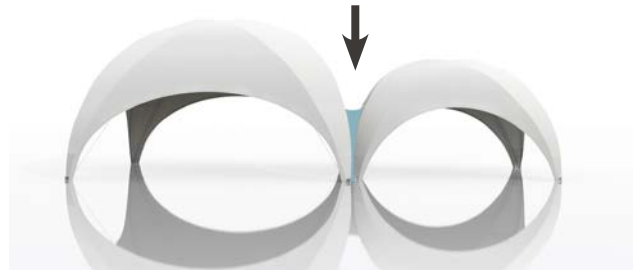


Connect Crossover Large with Crossover Medium

Gutters Large to Large

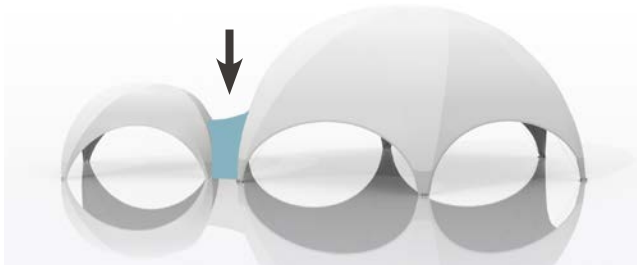


Connect Crossover Large with Hexadome Large

Gutters Large to Medium

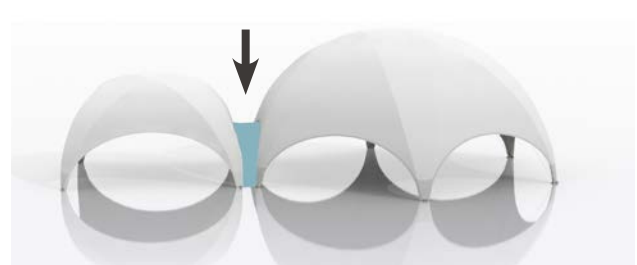

Connect Crossover Large with Hexadome medium




Footprint

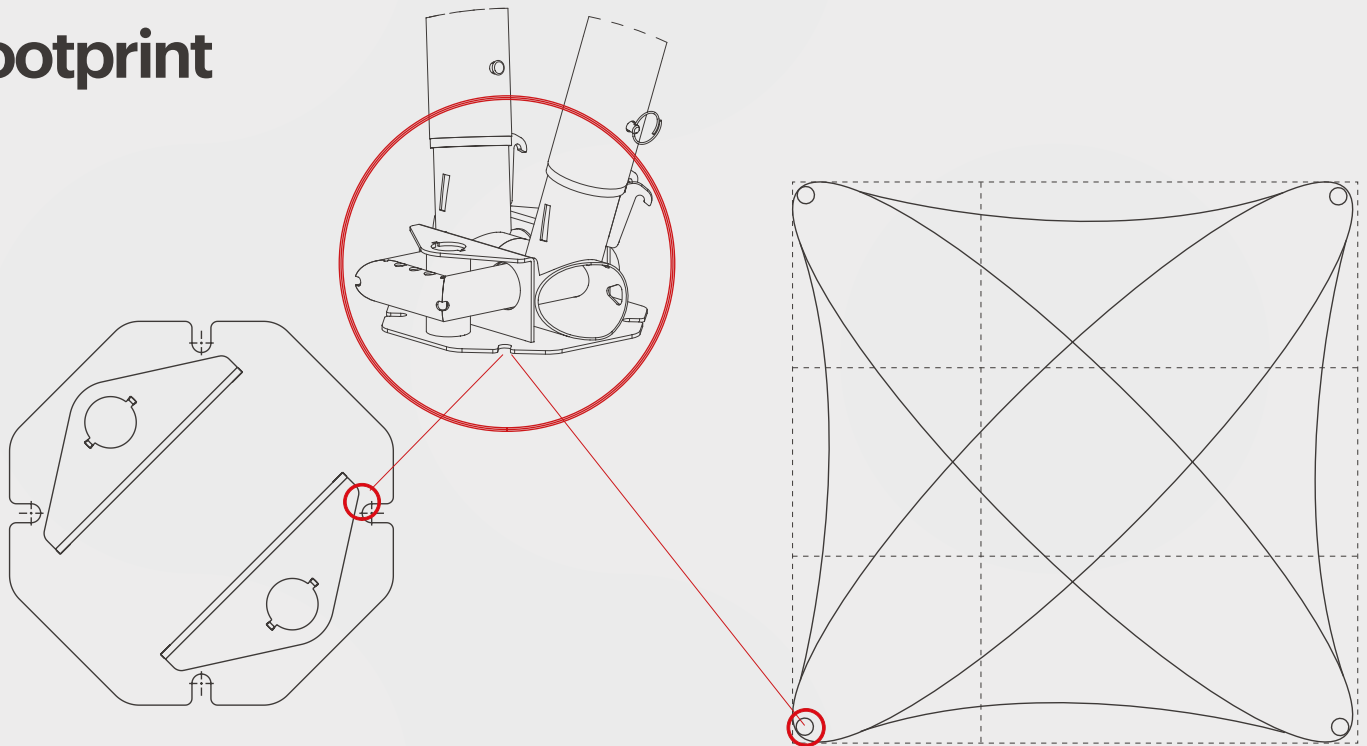

PRODUCTSHEET

CROSSOVER Large 68m²

Anchoring and Ballast

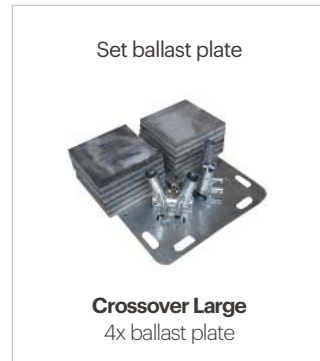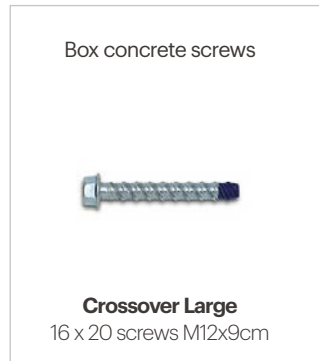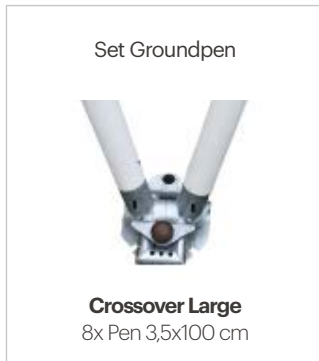

Ballast Requirements

Ballast requirements per peak wind velocity

	Max peak velocity according to European standards	Max peak velocity according to European standards	Max peak velocity according to European standards	Required ballast according to European standards
Crossover large	78,8 km/u	21,9 m/s	42,5 knots	590 kg

Ballast per peak wind velocity

	40 km/u	50 km/u	60 km/u	70 km/u	80 km/u	90 km/u	100 km/u
Ballast	152 kg	238 kg	342 kg	466 kg	608 kg	770 kg	950 kg

Numbers and weight per foot.

Based on: Peak wind velocity, measured on the highest point of the structure! All side panels closed! Ballast system used!