

# ProSeries™ HB Side / HB Top

## PERFORMANCE AND RELIABILITY

- Blown polyethylene filter for **excellent resistance to high pressures (3.5 bar)**
- **Tank manufactured according to the NSF standard**
- **High resistance to treatment products**
- **Weather resistant**, can be installed outdoors
- **Easy maintenance of the filtering medium** without removing the valve
- **Swivel-mounted laterals** for ease of maintenance
- **40 to 50 micron filtration**



ProSeries™ HB Side

ProSeries™ HB Top




Vari-Flo™ 6-position valve



Sand easily accessible by removing the collar



Drain with plug that also serves as a dismantling tool

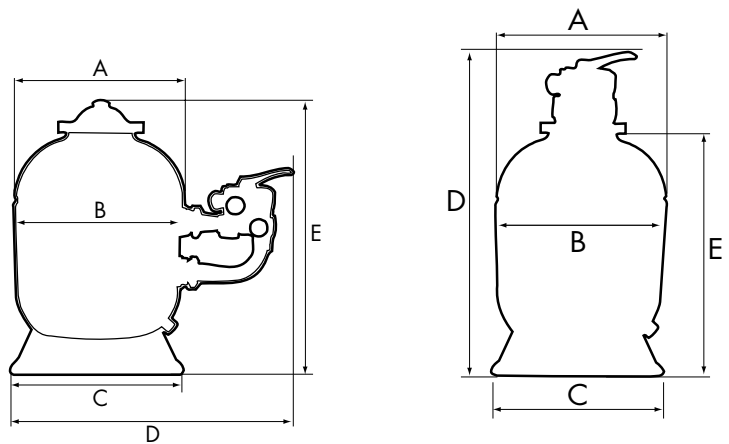

**PROSERIES™ HB SIDE**

Flow rate*	Diameter Ø	In/Out	Filtration area	Weight empty	Sand	Dimensions					Item
						A	B	C	D	E	
10 m³/h	510 mm	1" ½	0.20 m²	17 kg	100 kg	510 mm	498 mm	521 mm	825 mm	810 mm	S210SXE
14 m³/h	612 mm	1" ½	0.28 m²	24 kg	150 kg	612 mm	594 mm	521 mm	875 mm	920 mm	S244SXE
22 m³/h	762 mm	2"	0.45 m²	35 kg	250 kg	762 mm	725 mm	585 mm	1070 mm	1008 mm	S0310SXE
30 m³/h	895 mm	2"	0.64 m²	61 kg	350 kg	895 mm	880 mm	585 mm	1230 mm	1147 mm	S0360SXE

**PROSERIES™ HB TOP**

6 m³/h	401 mm	1" ½	0.12 m²	12 kg	50 kg	401 mm	391 mm	371 mm	858 mm	598 mm	S166TXE
10 m³/h	511 mm	1" ½	0.20 m²	17 kg	100 kg	511 mm	500 mm	521 mm	989 mm	729 mm	S210TXE
14 m³/h	612 mm	1" ½	0.28 m²	24 kg	150 kg	612 mm	594 mm	521 mm	1097 mm	837 mm	S244TXE
22 m³/h	762 mm	2"	0.45 m²	31 kg	250 kg	762 mm	725 mm	585 mm	1240 mm	934 mm	S0310TXE
30 m³/h	895 mm	2"	0.64 m²	61 kg	350 kg	895 mm	880 mm	585 mm	1374 mm	1068 mm	S0360TXE

\* Provide sufficient height to open the filter (minimum clearance height: 650 mm above the filter).